



Step 1

Remove nails from top, middle, bottom back of racks which need to be connected pic. 1 and 2

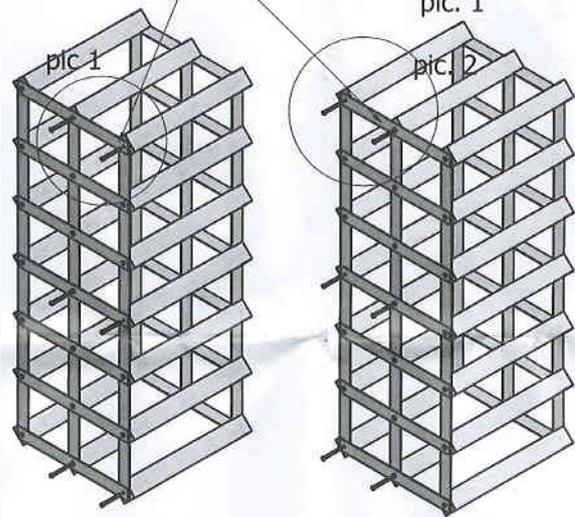


Step 2

Fix connecting strips of metal (supplied in box) using new nails (supplied in box) to back top, middle and bottom of wine rack pic. 3

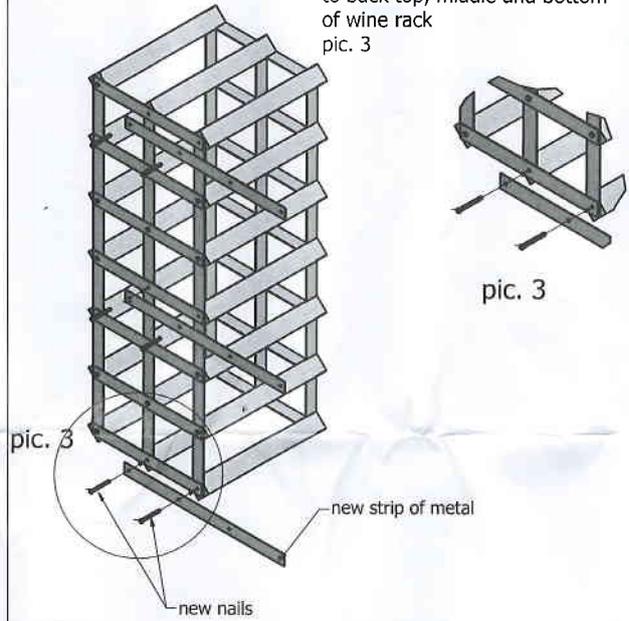


Step 3

Line up second rack with holes in connecting strips. Ensure holes in rack line up with all metal strips pic. 4

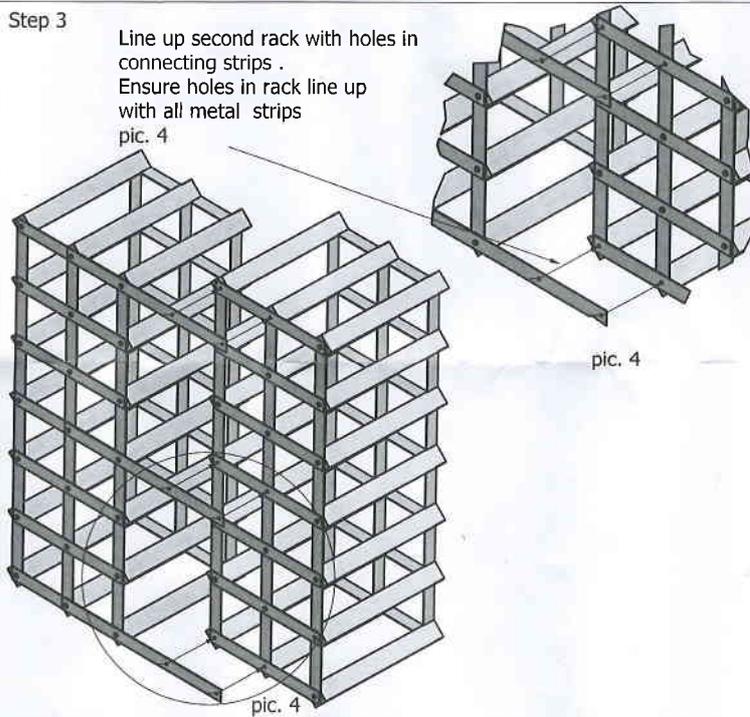


Step 4

place new nails (supplied in box) to back of wine rack pic. 5

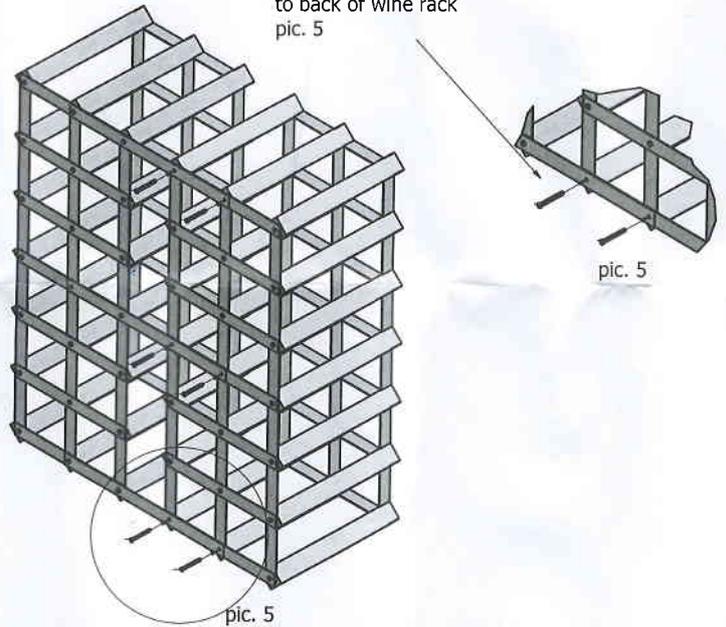

Step 5

1. push front connecting strip in slots, at front of rack
2. push racks together to close any gaps pic. 6

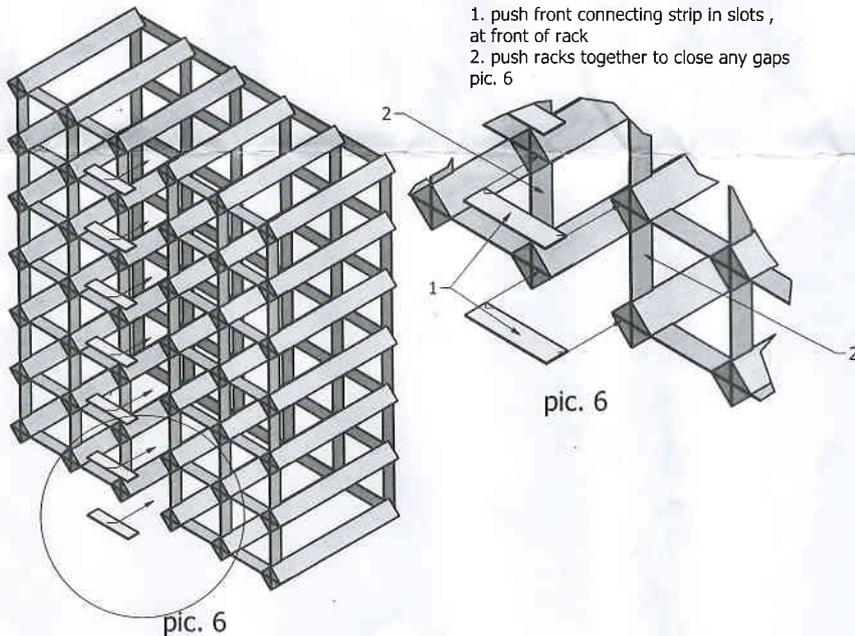

connection kit contains :

-  X 12 nails
 -  X 3 back connecting strips
 -  X 13 front metal strips
- connecting kit will join up to 12 holes

tool required for fitting connection kit :

- hammer
- pliers

